18 Port Gigabit Ethernet Switch with 16 Port PoE

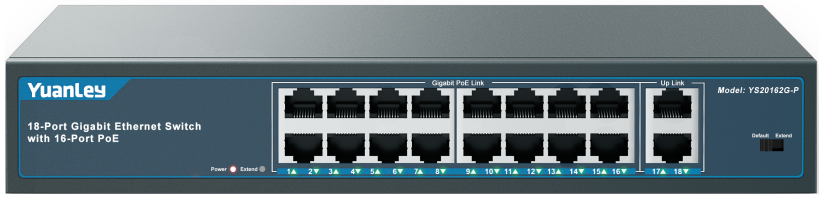

- ☒ 16*10/100mbps POE port;2*100/1000mbps UP Link;
- ☒ 250m Distance;Vlan support
- ☒ Support IEEE802.3AF/AT
- ☒ Whole Power:250W(52V 4.8A)
- ☒ All port supported by MDI/MDIX auto flip and self negotiation
- ☒ Supply 18 10/100/1000Mpbs adaptive high speed forwarding data packet non-lost port.
- ☒ Support IEEE802.3x flow control for Full-duplex mode and backpressure for Half-duplex mode.
- ☒ Each port max. power supply reached 30W.

Application:

- ☒ Wireless Access Point
- ☒ IP Camera
- ☒ IP Phone
- ☒ Computer Networks

Product	16+2 port 250m POE switch(Built-in)
Model No.	Hi-F1620GBL-A
PoE Port	1 to 16 port support IEEE802.3af/at
UP link port	17^{th}-18^{th} port support 1000Mbps
PoE output	15.4W/30W IEEE802.3af/at
PoE whole power	≤250W
PoE type	End-span
Power distance	≤250m
Network Standard	IEEE 802.3、 IEEE802.3u、802.3x、802.3af/at
Network Medium	100/1000BASE-TX: 5 class and above non shielded twisted pair
Data Distance	≤250m
Switch capability	12Gbps
Forwarding Mode	Store and forward
Forwarding Rate	100Mbps:14880pps 1000Mbps:14800pps 1000BASE-T: 1488095pps/port
MAC Address	2K MAC address table
Port function	Power priority mechanism, fast and forward, MAC automatic learning and aging IEEE802.3X Full-duplex and mode and backpressure for Half-duplex mode
Indicator	LINK/ACT. 100Mbps;POE Status indicator; POWER indicator;EXTENDER indicator
Working Environment	Working Temperature: -10° -- 55° C
Input power	AC100-240V 50/60HZ
Weight	2.1kg
Size	270mm*180mm*44mm(L*W*H)